



# ThermoGlo™

Models RR5-48.5 & RR5-42

Fry Dump Station

Item No: \_\_\_\_\_

AIA FILE NO./ SPEC NO.

CONSULTANT/ CONTRACTOR APPROVAL



Model RR5- 48.5LT  
(dump left shown)

The Marshall **Models RR5-48.5 and RR5-42** Fry Dump Stations feature our ThermoGlo™ heating technology. Heat radiates from every square inch of the upper flat plate heating surface. This eliminates the need to clean intricate cal-rod, wire and reflector assemblies. There is also auxiliary bottom heat. This dump station includes four organizers and a fry dump pan with a bagged fry holder.

All Marshall products are supported by a nationwide service organization and in-house, full-time Customer Support Department. To place an order call:

(1-800-627-8368)

**Marshall's Fry Dump Station incorporates ThermoGlo™ technology designed to solve demanding warming and holding temperature requirements.**

## FEATURES

- Flat surface allows for easy wipe-clean maintenance
- Food stays “presentation ready” longer because internal food temperatures are maintained longer
- Illumination provided by four 60-watt food grade incandescent bulbs
- Can be oriented for either dump-left or dump-right
- Includes Marshall’s ten-channel timer, which is field convertible for dump-left or dump-right

## CONSTRUCTION

- Heavy gauge stainless steel
- Designed and built to custom specifications with heat radiating from the ThermoGlo™ surface
- Designed with a flat unbreakable radiating metal face encased in stainless steel housing

**ETL (US & Canada) & NSF Listed  
FOR COMMERCIAL USE ONLY**

*\*Ask about Marshall's companion High Speed Toasters, Conveyor Broilers and Ventilation Systems.*

---

### Marshall Air Systems, Inc.


419 Peachtree Drive South • Charlotte, North Carolina 28217 USA • Phone: (704) 525-6230 Fax: (704) 525-6229 • [www.marshallair.com](http://www.marshallair.com)



# ThermoGlo™

Models RR5-48.5 and RR5-42

## Fry Dump Station

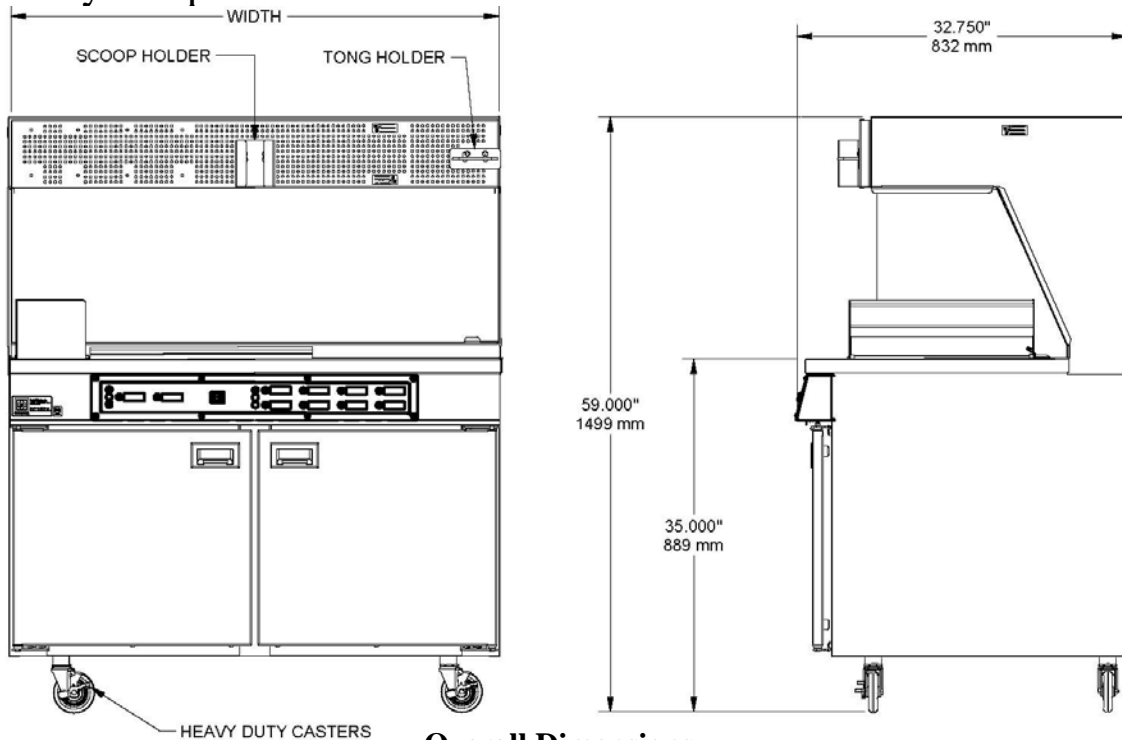

**Overall Dimensions  
Models RR5-48.5 and RR5-42**

<u>Dimensions:</u>	<u>Height:</u>	<u>Width:</u>	<u>Depth:</u>
RR5-48.5LT*	59" (1499 mm)	48.625" (1235 mm)	32.750" (832 mm)
RR5-48.5RT*	59" (1499 mm)	48.625" (1235 mm)	32.750" (832 mm)
RR5-42LT*	59" (1499 mm)	42.000" (1067 mm)	32.750" (832 mm)
RR5-42RT*	59" (1499 mm)	42.000" (1067 mm)	32.750" (832 mm)

<u>Shipping Information:</u>	<u>Weight:</u>	<u>Ship Wt.:</u>	<u>NMFC Freight (USA):</u>	<u>Ship. Cubes:</u>
RR5-48.5	400 lbs. (182 kilos)	475 lbs. (216 kilos)	Class 125	84.5 cubic ft. (2.4 cubic meters)
RR5-42	350 lbs. (159 kilos)	425 lbs. (195 kilos)	Class 125	74.4 cubic ft. (2.2 cubic meters)

<u>Electrical:</u>	
RR5-48.5	208V, 50/60Hz, 1Ph 14.75 amps/3.1 kW (includes 2 amps maximum for timer) 3 wire grounded type plug, NEMA 6-20 7 ft. cord
RR5-42	208V, 50/60Hz, 1Ph 13 amps/2.7 kW (includes 2 amps maximum for timer) 3 wire grounded type plug, NEMA 6-20 7 ft. cord

<u>Inserts:</u>	<u>Dump Pan:</u>	<u>Bag Holder:</u>	<u>Organizers:</u>
RR5-42	21" Wide	1 Row – 3.625" Wide	1 - 4.000" Wide 3 - 3.500" Wide
RR5-48.5	22" Wide	2 Rows – 6.875" Wide	1 – 5.000" Wide 3 – 4.000" Wide

\*LT = dump to left as shown / RT = dump to right (opposite of shown)

### Marshall Air Systems, Inc.

419 Peachtree Drive South • Charlotte, North Carolina 28217 USA • Phone: (704) 525-6230 Fax: (704) 525-6229 • www.marshallair.com